

# Price List of Grinding Machine

## Colloid Grinding



JMS Tube Outlet




JMS Complete Stainless Steel




JMS Experiment Type



JMS Standards Type

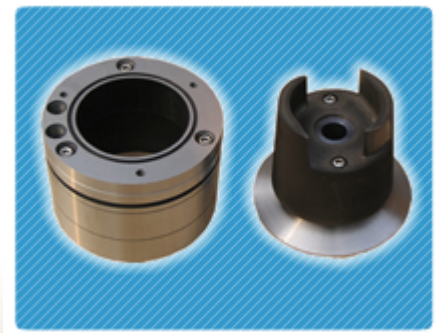



Model C Rotor

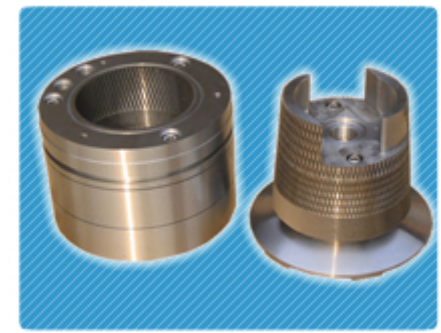

Rhombus Rotor

### Model & Technical Parameter

Model	Granularity (um)	Capacity (T/h)	Power (kw)	Rotation Rate/min (r/min)	Dimension (cm)	Weight (kg)
JMS-50	2 - 50	0.005 - 0.03	1.1	2840	53x26x58	70
JMS-80	2 - 50	0.1 - 0.5	4	2930	68x38x93	210
JMS-130	2 - 50	0.4 - 2.0	11	2930	99x44x105	420
JMS-180	2 - 50	0.8 - 6.0	18.5	2930	99x44x115	550
JMS-240	2 - 50	1.0 - 8.0	37	2930	135x60x140	800

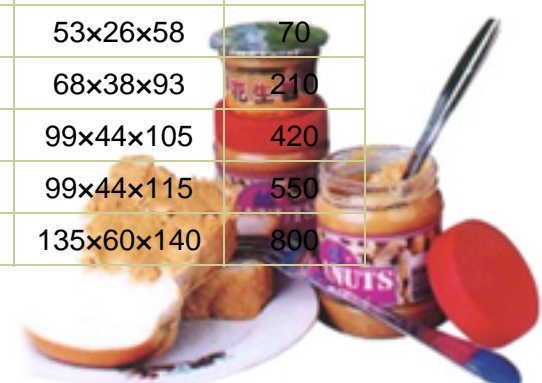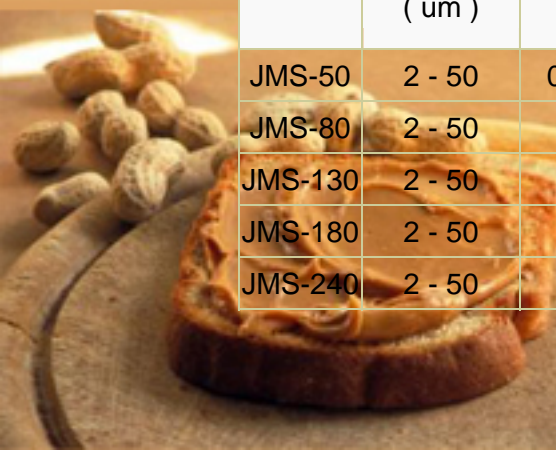

## CWM Ultra-micro Grinding



CWM Ultra-micro Grinding is a new product developed from many years' experience of grinding production. It is advanced in design and easy operation, which is a breakthrough in ultra-micro field. The machine does very well in grinding and breaking. Its main technical parameter has achieved advanced level both home and abroad.

The machine can be used for food, chemical, medicine, plastic, and so on plant for ultra-micro Grinding. Especially for **peanut**, sesame, colza seed, cacao, almond and so on. Its feature is high fineness, low temperature. After produced for market, it is popular by more and more users.

### Main Technical Parameter

Model	Fineness	Capacity	Rotation Rate/min	Power	Dimension ( mm )
CWM - 250	2 - 40 um	0.3-4T/h	2940r/min	22kw	1590x560x1620
CWM - 400	2 - 40 um	0.7-5T/h	1480r/min	37kw	1240x506x1556

